

--	--	--	--	--	--	--	--	--	--



P.E.S. College of Engineering, Mandya - 571 401

(An Autonomous Institution affiliated to VTU, Belgaum)

Third Semester, B.E. - Electronics and Communication Engineering

Semester End Examination; Dec - 2016/Jan - 2017

Signals and Systems

Time: 3 hrs

Max. Marks: 100


Note: Answer FIVE full questions, selecting ONE full question from each unit.

UNIT - I

- 1 a. For the following system, illustrate whether the system is linear, time invariant, memory, causal and stable?

i) $y(n) = g(n)x(n)$ ii) $y(t) = x^2(t)$ iii) $y[n] = \sum_{k=n_0}^n x(k)$.

- b. A system T has input-output pairs given as shown in figure below. Determine whether the system is memory less and causal.

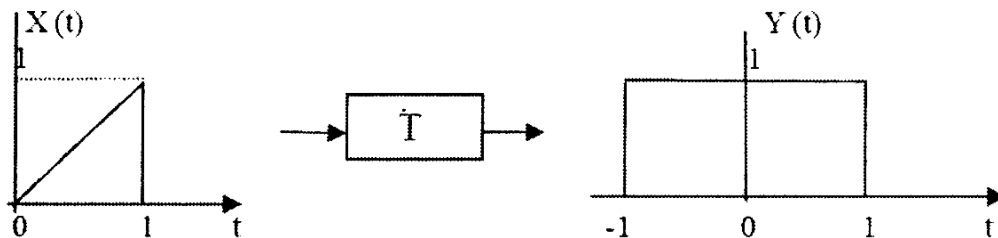

- c. Identify whether the following signals are energy or power signals? Also find its energy and Power.

i) $A \exp(\alpha + j\omega)t$ ii) $2 \exp(j3n)$.

- 2 a. Given a sequence $x(n) = (6-n)[u(n) - u(n-6)]$. Make a sketch of,

i) $y_1(n) = x(4-n)$ ii) $y_2(n) = x(2n-3)$.

- b. Determine whether the given signals are periodic. Determine the fundamental period, if periodic,

i) $x(n) = \cos[0.125\pi n]$

ii) $x(n) = \text{Re}\{\exp(jn\pi/12)\} + \text{Im}\{\exp(ejn\pi/18)\}$

iii) $x(t) = \cos^2(2\pi t)$

iv) $x(n) = \exp(jn\pi/16)\cos[n\pi/17]$.

- c. Find whether the following system is invertible;

i) $Y(t) = 10x(t)$ ii) $Y(t) = x^2(t)$

UNIT - II

3 a. An LTI system is characterized by $h(n) = \left(\frac{3}{4}\right)^n u[n]$. Compute the output of the system at time $n = 5, -5, 10$, when input $x[n] = u[n]$. 10

b. Prove the following identities,


i) $X[n]^* \delta[n] = X[n]$

ii) $X[n]^* \delta[n - n_0] = x[n - n_0]$

iii) $x(n)^* u(n) = \sum_{k=-\infty}^n x[K]$

iv) $x(n)^* u(n - n_0) = \sum_{k=-\infty}^{n-n_0} x[K]$. 10

4 a. Find the overall impulse response $h(t)$ in terms of the impulse response for the system shown in figure below.

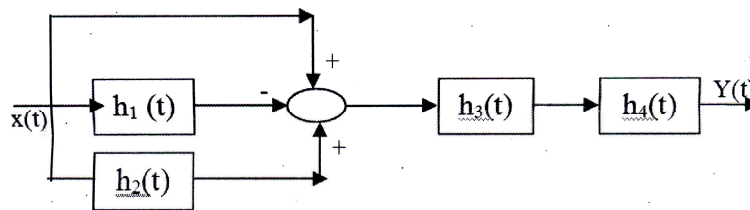

b. Given $h(t) = e^{-t}u(t)$ and $x(t) = e^{-3t} \{u(t) - u(t-2)\}$. Determine; $y(t)$ using convolution integral. Also plot $y(t)$. 8

c. Represent following difference equation in Direct form-I and Direct form-II block diagram representation, 8

$$y(n) + 0.5y(n-1) - 0.25y(n-2) + 0.33y(n-3) = x(n) + 3x(n-1) + 2x(n-2).$$

UNIT - III

5 a. Evaluate the DTFS representation for the signal, $x(n) = \sin\frac{4\pi}{21}n + \cos\frac{10\pi}{21}n + 1$. Sketch magnitude and phase spectra. 10

b. State and Prove Parseval's theorem using DTFS definition. 10

6 a. Consider the Signal,

$$x(n) = 2 + 2 \cos\frac{\pi}{4}n + \cos\frac{\pi}{2}n + \frac{1}{2} \cos\frac{\pi}{4}n$$
10

i) Determine and sketch its power density spectrum

ii) Evaluate the power of the signal

b. Find FS coefficients for the periodic signal $x(t)$ with period 2 and $x(t) = e^{-t}$ for $-1 < t < 1$. 10

UNIT - IV

- 7 a. Find the Fourier transform of the rectangular pulse sequence, $x(n) = u[n] - u[n - N]$. 10
- b. Find the DTFT for the following signal, $x(n)$ and draw its spectrum $x(n) = a^n u(n)$; magnitude of $a < 1$. 10
- 8 a. State and Explain Sampling theorem. 8
- b. Using Convolution Theorem find inverse Fourier transform of $X(j\omega) = \frac{1}{(a + j\omega)^2}$. 6
- c. Use Parseval's theorem to evaluate :

$$x = \sum_{n=-\infty}^{\infty} \frac{\sin^2(Wn)}{\pi^2 n^2}. \quad 6$$

UNIT - V

- 9 a. Find the Z-Transform of,
- i) $x[n] = \left(-\frac{3}{4}\right)^n u(n) + 2\left(\frac{1}{2}\right)^n u(n)$. Specify its ROC. 10
- ii) $x[n] = \left(\frac{1}{3}\right)^n \sin\left(\frac{\pi n}{4}\right) u(n)$. Determine its ROC. Analyze Pole Zero Plot.
- b. Find the inverse Z-transform using partial fraction expansion method,
- $$x(z) = \frac{1 + 2Z^{-1} + Z^{-2}}{1 - \frac{3}{2}Z^{-1} + \frac{1}{2}Z^{-2}} \quad |Z| > 1 \quad 10$$
- 10 a. A causal system is represented by the following difference equation,
- $$y(n) + 0.25y(n-1) = x(n) + 0.5x(n-1), \quad 10$$
- i) Determine the system function $H(Z)$ and the corresponding ROC.
- ii) Determine the unit sample response of the system in analytical form.
- b. Solve the difference equation $y(n) + 3y(n-1) = x(n)$ with $x(n) = u(n)$ and the initial condition $y(-1) = 1$ using Z-Transform method. 10

* * *