



**P.E.S. College of Engineering, Mandya - 571 401**

(An Autonomous Institution affiliated to VTU, Belgaum)

**Fifth Semester, B.E. - Industrial and Production Engineering**

**Semester End Examination; Dec - 2016/Jan - 2017**

**Control Engineering and Machine Tool Technology**

Time: 3 hrs


Max. Marks: 100

*Note: i) Answer FIVE full questions, selecting ONE full question from each unit.*

*ii) Missing data, if any, may suitably assume.*

**UNIT - I**

- 1 a. With a neat block diagram explain a regulator feedback control system. 6
- b. Draw the equivalent analogy circuit for the mechanical system shown in Fig. Q1(b) and obtain the differential equation. 14



- 2 a. Differentiate between open loop and closed loop system. 8
- b. Derive the transfer function for a DC motor. 12

**UNIT - II**

- 3 a. Explain the following input with graph : 8
  - i) Step input      ii) Ramp input      iii) Sinusoidal input.
- b. Find the time response, initial value and final values of the functions :

i)  $F(S) = \frac{S(S+10)}{(S+2)(S+4)(S+6)}$  12

ii)  $F(S) = \frac{12(S-1)}{S(S+2)^2(S+3)}$

- 4 a. Explain the following error constants : 12
  - i) Position error constant      ii) Velocity error constant      iii) Acceleration error constant.

- b. The unit step response of a system is given as, 8

$$c(t) = \frac{5}{2} + 5t - \frac{5}{2}e^{-2t}$$
 Find the transfer function of the system.

**UNIT - III**

- 5 a. Obtain the overall transfer function for the block diagram shown in Fig. Q.5(a) using block diagram reduction. 10

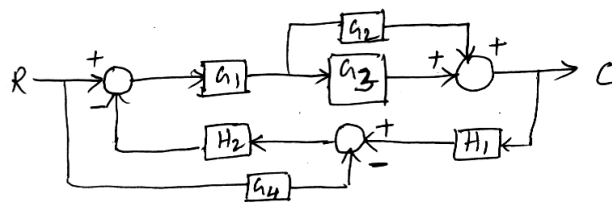


Fig Q.5(a)

- b. Convert the block diagram shown in Fig. Q(5(a) into signal flow graph and obtain the transfer function using Mason's gain formula. 10
- 6 a. Find C/R for the system shown in the Fig. Q.6(a) using block diagram reduction, 10

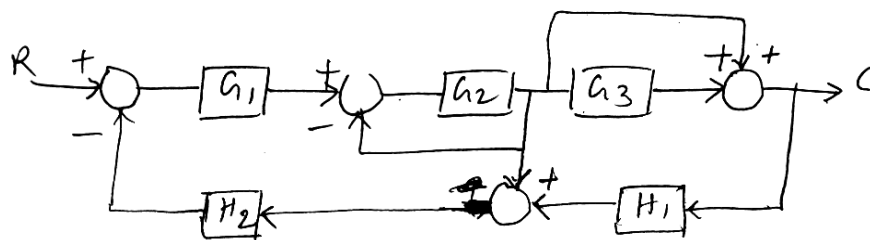


Fig Q.6(a)

- b. Draw the signal flow graph for the block diagram shown in Fig. Q6(a) and obtain C/R Ratio using Mason's Gain formula 10

**UNIT - IV**

- 7 a. What are the characteristics of a machine tool? 10
- b. Explain with sketch cutting motion in machine tool. 10
- 8 a. Explain the various requirement of machine tool. 10
- b. Explain the design consideration for the machine tool structure. 10

**UNIT - V**

- 9. Design gear box incorporation a rupport drive with 8 speed having a combination 1 x 4 x 2. The maximum speed is 1200 and progression ratio is 1.2. Determine; 20
  - a) All the speech
  - b) No. of teeth on each gear
  - c) Gear box layout
  - d) Ray diagram
  - v) Torque transmitted, if the motor is delivering 10 HP and speed is 1500 rpm.
- 10a. Explain PIV Drive used in machine tool with a neat sketch. 10
- b. Explain with a hydraulic circuit the reciprocating movement of a shaper. 10

\* \* \*