



P.E.S. College of Engineering, Mandya - 571 401

(An Autonomous Institution affiliated to VTU, Belagavi)

Fifth Semester, B.E. - Industrial and Production engineering

Semester End Examination; Dec. - 2019

Control Engineering and Machine Tool Technology


Time: 3 hrs

Max. Marks: 100

Note: Answer FIVE full questions, selecting ONE full question from each unit.

UNIT - I

- 1 a. Explain with block diagram open loop and closed loop control system. Also mention their differences. 8
- b. With the help of a block diagram, explain an automobile driving system. 12
- 2 a. What are the requirements from a control system? Explain. 10
- b. Obtain the transfer function for the electrical system shown in Fig. 2(b). 10

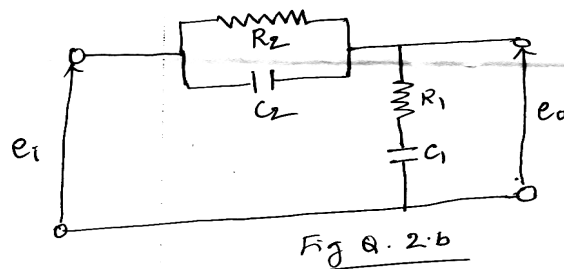

UNIT - II

- 3 a. Explain the following input in control system: 12
 - i) Step input
 - ii) Ramp input
 - iii) Sinusoidal input
- b. Find the response, initial value and final value for the following functions: 8

i) $F(S) = \frac{S(S+10)}{(S+2)(S+4)(S+6)}$

ii) $F(S) = \frac{12(S+1)}{S(S+2)^2(S+3)}$

- 4 a. Explain Type-0, Type-1 and Type-2 system for ramp input of magnitude 'A'. 12
- b. Determine the error coefficient and static errors for units and non units feedback system; 8

$G(S) = \frac{1}{S(S+1)(S+10)}, H(S) = (S+2)$

UNIT - III

- 5a. Reduce the block diagram into simple form and calculate the closed loop transfer function for the block diagram shown in Fig. Q.5a. 14

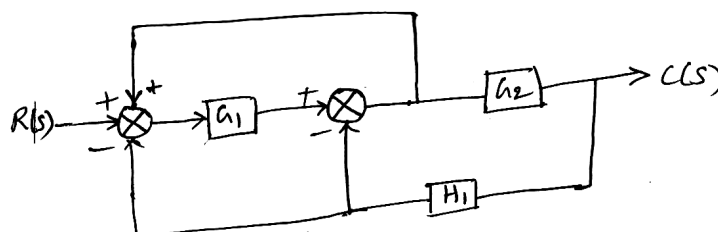


Fig Q.5a

- b. Illustrate with block diagram the method of transferring take off point ahead of summing point and behind the summing point. 6
- 6 a. Explain Mason's gain formula. 6
- b. Draw the signal flow graph for the block diagram shown in Fig. Q.5a and find the closed loop transfer function using Mason's Gain formula. 14

UNIT - IV

- 7 a. Explain the characteristic of machine tools. 8
- b. Briefly explain the classification of machine tool. 12
- 8 a. Design the machine tool bed based on rigidity and dynamic characteristics. 10
- b. With the help of sketches, explain difference types of slide ways used in machine tools state their application. 10

UNIT - V

9. An eight speed gear box is to be designed for transmitting 7 kW power minimum speed is 100 rpm speed are to be arranged in geometric progression with a progression ratio 1.25. Motor shaft runs at 1000 rpm and input to the first shaft of the gear box may be taken as 500 rpm. 20
- i) Calculate the values of all speeds
- ii) Draw the speed diagram
- iii) Sketch the layout of gear box showing the number of teeth on each gear
- iv) Module calculation between shaft I and II
- 10 a. Explain Ruppert drive . 10
- b. Explain with a neat sketch a PIV drive. 10

* * *