



**P.E.S. College of Engineering, Mandya - 571 401**

*(An Autonomous Institution affiliated to VTU, Belgaum)*

**Third Semester, B.E. - Industrial and Production Engineering**

**Semester End Examination; Dec - 2016/Jan - 2017**

**Mechanics of Materials**

Time: 3 hrs

Max. Marks: 100

*Note: Answer FIVE full questions, selecting ONE full question from each unit.*

**UNIT - I**

1 a. The tensile test was conducted on a mild steel bar. The following data was obtained from the test.

Diameter of steel bar = 16 mm, Gauge length of the bar = 80 mm, Load at proportionality limit = 72 kN, Extension at a load of 60 kN = 0.115 mm, Load at failure = 80 kN. Final gauge lengths of bar = 104 mm. Diameter of the rod at failure = 12 mm. Determine;

- i) Young’s modulus
- ii) Proportionality limit
- iii) True breaking stress
- iv) Percentage elongation.

b. Derive the equation for total extension of a tapering bar of circular cross section.

2 a. A settle bar ABCD of varying sections is subjected to the axial forces as shown in Fig. Q2(a). Find the value of ‘P’ necessary for equilibrium. If  $E = 210 \text{ kN/mm}^2$ . Determine;

- i) Stress in various segments
- ii) Total elongation of the bar
- iii) Total strain in the bar.

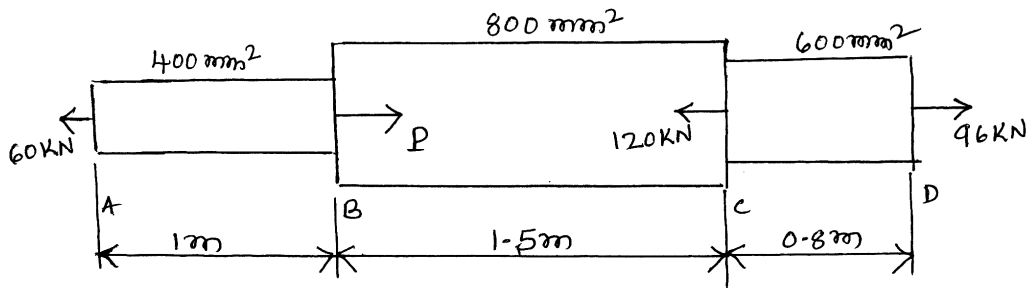


Fig. Q2(a).

b. Determine the changes in length, width and thickness of a steel bar which is 4 meters long, 30 mm wide and 20 mm thick and is subjected to an axial pull of 30 kN in the direction of length.  $E = 2 \times 10^5 \text{ N/mm}^2$  and Poisson’s ratio = 0.3. Also determine the volumetric strain, change in volume and final volume of the given bar.

**UNIT - II**

3 a. A steel tube of 25 mm external diameter and 18 mm internal diameter encloses a copper rod of 15 mm diameter. The ends are rigidly fastened to each other. Calculate the stress in the rod and the tube when the temperature is raised from 15°C to 200°C.

Take  $\alpha_{\text{steel}} = 11 \times 10^{-6}/^\circ\text{C}$ ,  $\alpha_{\text{copper}} = 18 \times 10^{-6}/^\circ\text{C}$ ,  $E_{\text{steel}} = 200 \text{ GPa}$  and  $E_{\text{copper}} = 100 \text{ GPa}$ .

- b. A point in a strained material is subjected to a tensile stress of  $500 \text{ N/mm}^2$  and  $300 \text{ N/mm}^2$  in two mutual perpendicular planes. Calculate the normal, tangential, resultant stresses and its obliquity on a plane making an angle of  $30^\circ$  with the axis of the second stress, also find the maximum shear stress. 8
- 4 a. Derive an equation for normal stress on a plane inclined at an angle  $\theta$  is subjected to two perpendicular normal stresses accompanied with a state of simple shear. 8
- b. A point in a strained material is subjected to stress as shown in Fig. Q 4(b). Find using Mohr's circle method the normal, tangential and resultant stress across the plane EF. Also determine the maximum, minimum principal stresses, its locations. 12

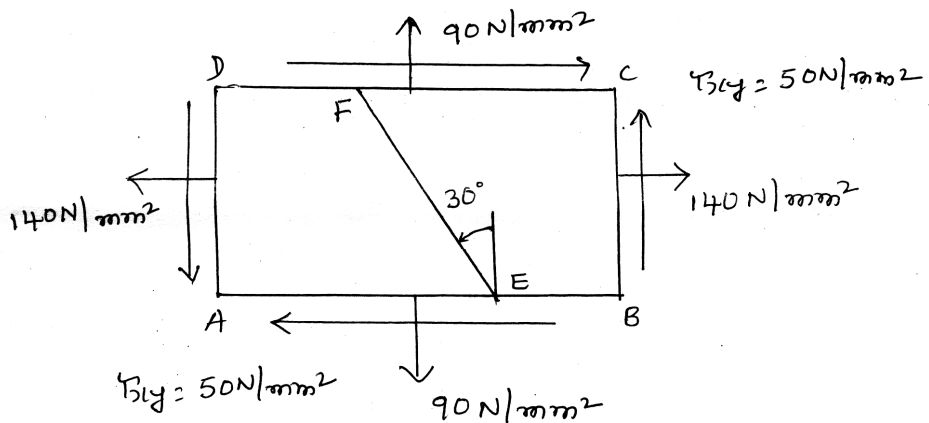


Fig 9 4(b)

**UNIT - III**

- 5 a. A thick cylindrical pipe of outside diameter 300 mm and internal diameter 200 mm is subjected to an internal fluid pressure of  $20 \text{ N/mm}^2$  and external fluid pressure of  $5 \text{ N/mm}^2$ . Determine the maximum hoop stress developed. Draw the variation of hoop stress and radial stress across the thickness indicating the values at every 25 mm interval. 12
- b. With neat sketches, explain different types of beams, supports and loads. 8
- 6 a. Draw the shear force and bending moment diagram for the beam shown in Fig. Q 6(a) locate the point of contra flexure if any. 12

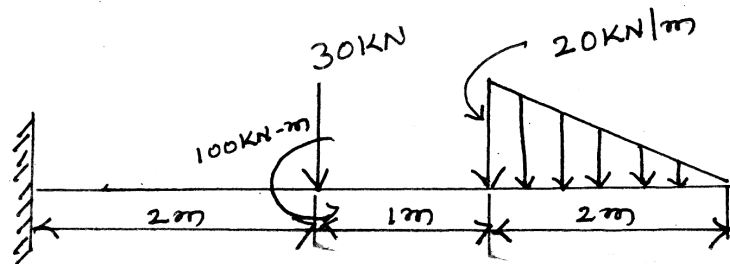


Fig 9 6(a)

- b. Derive the relationship between load, shear force and bending moment. 8

**UNIT - IV**

- 7 a. Compare the flexure strength of the following three beams of equal weight. Same material and same lengths.
- i) I-section 200 mm x 300 mm having 10 mm flange thickness and 10 mm web thickness 12
  - ii) Rectangular section having depth equal to twice the width
  - iii) Solid circular section.
- b. A cast Iron bracket of I-section with equal flanges of 100 mm x 200 mm having 10 mm flange thickness and 5 mm web thickness carries as UDL of 10 kN/m. On a span of 10 meters length determine the position of neutral axis, MI about the neutral axis and the maximum stress distribution. 8
- 8 a. Draw the shear stress distribution for;
- i) I-section
  - ii) T-section. 8
- b. A beam of 'T' section has flanges 100 mm x 20mm and web 200 mm x 12 mm is subjected to a vertical shear force of 200 kN. Find the shear stress at the flange, junction, and neutral axis. Also sketch the stress distribution diagram. 12

**UNIT - V**

- 9 a. A cantilever beam of 2 meters long is carrying a load of 20 kN at its free end and 30 kN at a distance of 1 meter from the free end. Find the slope and deflection at the free end take  $I = 15 \times 10^7 \text{ mm}^4$ .  $E = 2 \times 10^5 \text{ N/mm}^2$ . 12
- b. Derive an equation for maximum deflection of a simply supported beam with 9 point load at center. 8
- 10 a. A solid shaft is subjected to a maximum torque of 25 kN-m. Find a suitable diameter of a solid shaft. If the allowable shear stress and the twist are limited to  $80 \text{ N/mm}^2$  and  $1^\circ$  respectively for a length of 20 times the diameter of the shaft. 8
- b. What are columns and types of columns? Explain. 4
- c. Explain the following :
- i) Slenderness ratio
  - ii) Radius of gyration 8
  - iii) Most commonly used end conditions for the analysis of columns.

\* \* \*