



P.E.S. College of Engineering, Mandya - 571 401

(An Autonomous Institution affiliated to VTU, Belgaum)

Third Semester, B.E. - Civil Engineering

Semester End Examination; Dec - 2016/Jan - 2017

Strength of Materials

Time: 3 hrs

Max. Marks: 100

Note: i) Answer **FIVE** full questions, selecting at least **ONE** full question from each unit.
ii) Missing data, if any, may be assumed suitably and clearly mentioned.

UNIT - I

- 1 a. Define stress, strain, upper and lower yield stress, breaking stress. 4
- b. Derive expression for change in length ' δl ' of a bar of varying diameter from d_1 to d_2 and length l . 8
- c. A mild steel specimen tested under tension test and following results were obtained,
- | | | |
|---|----------|---|
| i) Diameter of specimen | 20 mm | |
| ii) Length of specimen | 0.2 m | |
| iii) Extension under a load of 10 kN is | 0.032 mm | |
| iv) Load at yield point is 82 kN at C (lower yield point) | | |
| v) Maximum load is | 133 kN | 8 |
| vi) Length of specimen after failure is | 0.252 m | |
| vii) Diameter of neck is | 12.6 mm | |
- Calculate;
- I) Young's modulus II) Yield stress III) Ultimate stress IV) % Elongation
V) % Reduction in area VI) Working stress, if factor of safety is 2.
- 2 a. List and define elastic constants with equations. 5
- b. Derive relationship between E and K [Young's modulus and Bulk modulus]. 7
- c. A steel rail is 30 m long at a temperature of 20°C. Estimate the elongation when the temperature increases to 80°C. 8
- Calculate the thermal stress developed in the rail if,
- i) No expansion joint is provided
- ii) A gap of 10 mm is provided for expansion, $E = 200 \text{ GPa}$, $\alpha = 12 \times 10^{-6}/^\circ\text{C}$.


UNIT - II

- 3 a. Define principal stress and principal planes (directions). 4
- b. In a two dimensional stress system (2D stress system), Derive expression for normal and tangential component of stresses on a given plane. 8


- c. At a certain point in piece of elastic material there are normal tensile stresses $f_x = 120 \text{ MPa}$, $f_y = 60 \text{ MPa}$. In addition there is a positive shearing stress (Left up right down) $q = 80 \text{ MPa}$. Determine;
- i) The magnitude and directions of the principal stresses
 - ii) The magnitude and direction of the maximum shearing stress
 - iii) The normal and shearing stress on a plane inclined at 30° to the direction of 120 MPa .
- 4 a. Derive an expression for circumferential stress (f_1) and longitudinal stress (f_2) in the case of thin cylinder. 4
- b. Derive expressions for change in diameter, change in length and change in volume of a thin cylinder. 8
- c. A thick cylinder of 400 mm material diameter and 100 mm thickness contains a fluid at a pressure of 80 N/mm^2 . Find the maximum and minimum hoop stresses across the section. 8
Also sketch the radial and hoop stress distribution across the section.

UNIT - III

- 5 a. Define bending moment, shear force, BMD and SFD. 4
- b. Derive relationship between intensity of uniformly distributed load w , shear force F and bending moment M . 6
- c. Draw BMD and SFD for the beam shown in Fig. Q. 5(c).

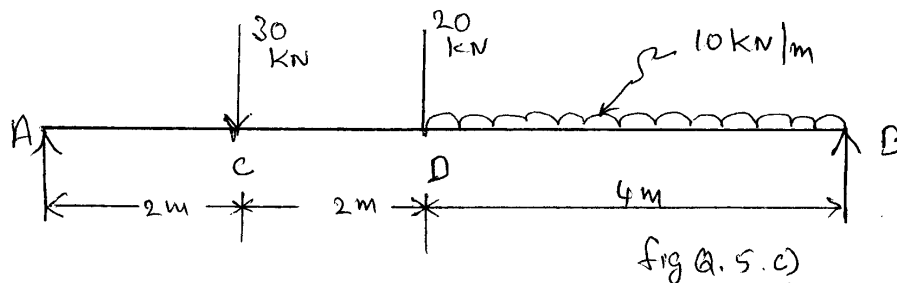


- 6 a. Define point of contra flexure, bending moment (Hogging and sagging bending moment) and shear force (positive and negative shear force). 4
- b. For a simply supported beam carrying uniformly distributed load w/m over entire span l , Show that maximum B.M, $M_{\max} = \frac{wl^2}{8}$ at $x = \frac{l}{2}$ from either support. 6
- c. Draw BMD and SFD for the beam shown in Fig. Q 6(c). Find the point of contra flexure and maximum bending moment. 10

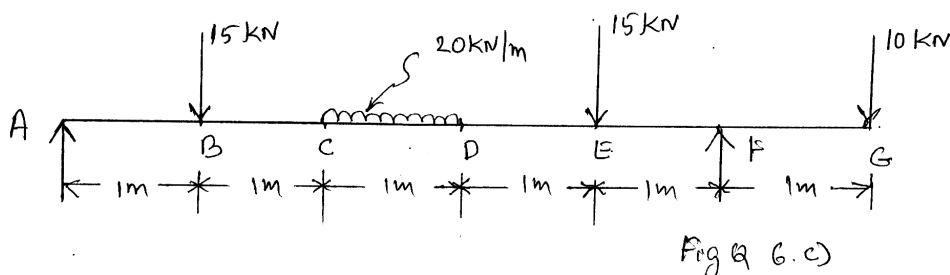

UNIT - IV

- 7 a. State assumptions made while deriving (Bernoulli) bending equation. 3
- b. Derive bending equation (Bernoulli equation) with usual notations. 7
- c. A wooden beam 10 m long 360 mm deep and 300 mm wide is simply supported and loaded with a uniformly distributed load. Find the safe total load. Factor of safety = 6, maximum shear intensity of the material is = 60 MPa. 10
- 8 a. Draw shear stress variation diagram for various standard sections (including triangle, rhombus and T - Section). 3
- b. Show that maximum shear stress is 1.5 times average shear stress for a rectangular section. 7
- c. A T-Section beam shown in Fig. Q 8(c) is subjected to a shear force of 9 kN at a section. Determine the amount of maximum intensity of shear stress and draw the distribution of shear stress across the depth of the section.

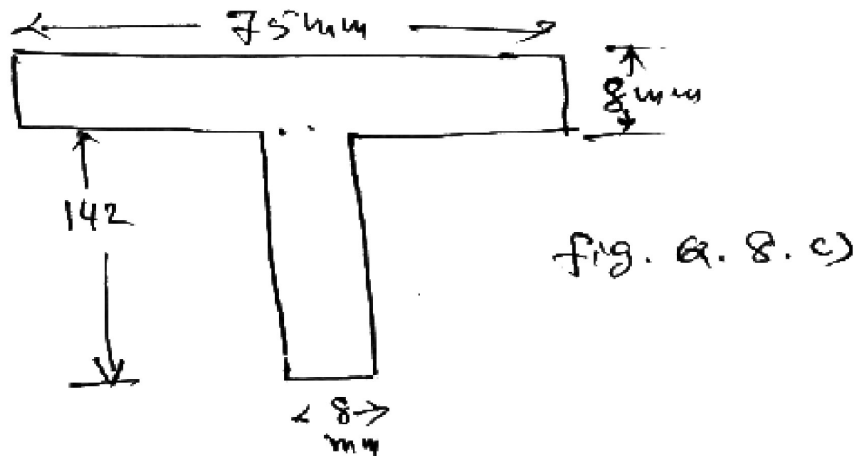

UNIT - V

- 9 a. State assumptions made while deriving deflection equation. 3
- b. Derive deflection equation with usual notations. 7
- c. A simply supported beam has a span of 6 m. It carries two concentrated loads of 40 kN and 10 kN at distance of 2 m and 4 m from left hand support. Find the deflection under the 40 kN load and the position and magnitude of maximum deflection. $E = 200 \text{ GPa}$ and $I = 40 \times 10^{-6} \text{ m}^4$. 10
- 10 a. Derive torque equation with usual notations. 7
- b. State assumptions made while deriving torque equation. 3
- c. Calculate the dimensions of a hollow steel shaft to transmit 600 kW at a speed of 120 r.p.m. the maximum torque being 1.12 times the mean (12% extra). The internal diameter of the shaft is 60% of the outside diameter and the greatest intensity of shear stress in the steel is limited to 28 MN/m^2 . 10