



P.E.S. College of Engineering, Mandya - 571 401

(An Autonomous Institution affiliated to VTU, Belagavi)

Sixth Semester, B.E. - Mechanical Engineering

Semester End Examination; May/June - 2018

Finite Element Methods

Time: 3 hrs

Max. Marks: 100

Note: i) Answer **FIVE** full questions, selecting **ONE** full question from each unit

ii) Missing data, if any, may be suitably assumed.

UNIT - I

- 1 a. What is finite method? List its engineering application. 6
- b. Explain node numbering scheme in the discretization process. 6
- c. With suitable example, explain the concept of plane stress and plane strain problems and write their stress-strain relations. 8
- 2 a. Solve the following simultaneous equations using Gauss elimination algorithm : 12
 $x_1 + x_2 + x_3 = 9; \quad x_1 - 2x_2 + 3x_3 = 8; \quad 2x_1 + x_2 - x_3 = 3$
- b. Evaluate the integral using two point Gaussian quadrature techniques $I = \int_{-1}^{+1} (x^2 + 2x + 2) dx$. 8

UNIT - II

- 3 a. Briefly explain the convergence criteria of a displacement function. 6
- b. Derive shape functions for a 3-noded triangular element in terms of Cartesian coordinate systems. 8
- c. Derive Jacobian matrix for a CST element. 6
- 4 a. Derive shape functions for a 9-noded quadrilateral element using Lagrangian interpolation function. 12
- b. The nodal displacement of a triangular element shown in Fig.Q4(b) are given by;
 $u_1 = 0.0 \text{ mm}; \quad u_2 = 0.003 \text{ mm}; \quad u_3 = 0.0 \text{ mm}; \quad v_1 = 0.0625 \text{ mm}; \quad v_2 = 0.0 \text{ mm}; \quad v_3 = 0.0625 \text{ mm};$
 Determine the displacement at point P whose x and y coordinates are $(50, 45) \text{ mm}$.

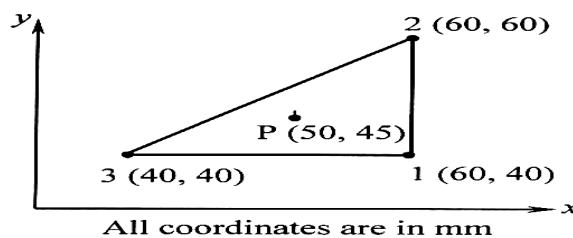


Fig. Q 4(b)

UNIT - III

- 5 a. For a 2-noded bar element, derive expression for element load vectors due to the body force and surface force. 10
- b. Derive strain-displacement matrix B for a quadratic bar element. 10
6. Determine the nodal displacements, elements stresses and support reaction of the axially loaded bar shown in Fig.Q6. Take $E = 200 \text{ GPa}$ and load $P = 300 \text{ kN}$. 20

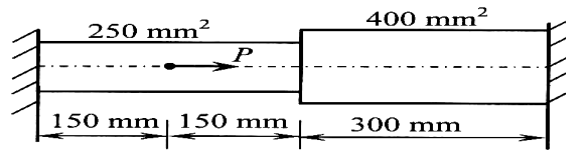


Fig. Q6

UNIT - IV

7. For the truss structure shown in Fig. Q 7(b), determine the nodal displacement, stress in each member and reaction at top support. Take $E = 200 \text{ GPa}$ and $A = 200 \text{ mm}^2$.


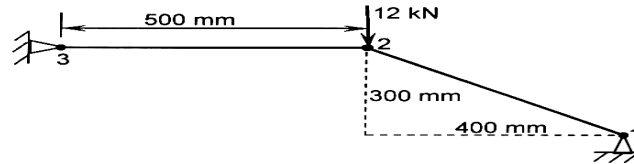


Fig. Q 7

8 a. A 2-noded beam element is subjected for a uniformly distributed load. Derive an expression for its load vector.

b. For the beam shown in Fig. Q7(b), determine the nodal deflections and slops.

Take $E = 70 \text{ GPa}$, $I = 3 \times 10^{-4} \text{ m}^4$.

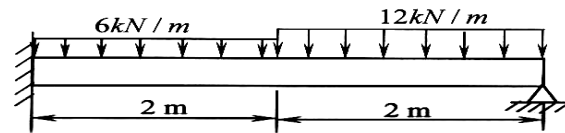

$E = 210 \text{ GPa}$, $I = 4 \times 10^{-6} \text{ m}^4$

Fig. Q 8(b)

UNIT - V

9 a. Using Galerkin's approach, derive the element conduction matrix for 1D element used for steady state heat transfer problems.

b. Inner surface temperature of a composite wall shown in Fig. Q9(b) is maintained at 20°C . The convective heat transfer takes place at outer surface with $h = 25 \text{ W/m}^2\text{C}$ and $T_\infty = -15^\circ\text{C}$. Determine temperature distribution in the wall.

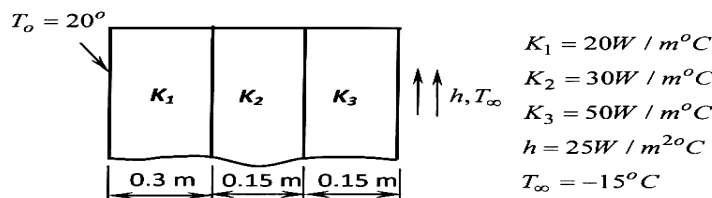


Fig. Q9(b)

10. A metallic fin, with thermal conductivity $K = 360 \text{ W/m}^\circ\text{C}$, 0.1 cm thick and 10 cm long extends from a wall whose temperature is 235°C . Determine the temperature distribution and amount of heat transferred from the fin to air at 20°C with $h = 9 \text{ W/m}^2\text{C}$. Take the width of fin to be 1 m and use three-element model.

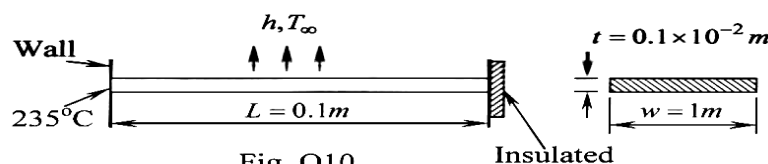


Fig. Q10

* * * *