

- 4 a. Prove that maximum shear stress is half the difference of principal stresses for a general two dimensional stress system. 8
- b. A point in a body is subjected to tensile stresses 100 MPa and 70 MPa along two mutually perpendicular directions. The point is also subjected to shear stress of magnitude 50 MPa. Determine;
- (i) Normal stress and shear stress acting on a plane which is at an angle of 120° with reference to the 100 MPa stress plane 12
- (ii) Magnitudes of principal stresses and maximum and minimum shear stresses
- (iii) Orientation of principal planes and maximum and minimum shear stress planes
- (iv) Normal stress on the planes of maximum and minimum shear stresses

UNIT - III

5. Draw the Shear force and bending moment diagram for a beam subjected to forces as shown in Fig. Q(5). Also find the location of point of contra flexure and magnitude of maximum bending moment. 20
6. Draw the Shear force and bending moment diagrams for a beam subjected to loads as shown in Fig. Q(6). Also find the location of point of contra flexure and magnitude of maximum bending moment. 20

UNIT - IV

- 7 a. Derive an expression for flexural equation, $\frac{M}{I} = \frac{\sigma_b}{y} = \frac{E}{R}$ with assumptions. 6
- b. A 2 m long cantilever with an un-symmetric 'I' section is subjected to a UDL of 20 kN/m. The 'I' section has (180 mm \times 10 mm) upper flange (100 mm \times 10 mm) bottom flange and (220 mm \times 10 mm) web. Draw the bending stress and shear stress distribution diagrams. 14
- 8 a. Show that maximum deflection for simply supported beam subjected to a concentrated load at the centre is, $\frac{WL^3}{48EI}$. 10
- b. A 2 m long cantilever is subjected to UDL of 10 kN/m through its length and a vertically downward point load 20 kN at its free end. Take; $E = 200$ GPa and maximum deflection as 0.3 mm. Determine the width and depth of rectangular section. Depth of the section is twice the width. 10

UNIT - V

- 9 a. State the assumptions made in pure torsion theory and derive an expression for shear stress produced in a circular shaft subjected to torsion. 10
- b. Define slenderness ratio and derive Euler's expression for a column with both ends hinged. 10
- 10 a. Derive Euler's expression for crippling load in a column subjected to a compressive load when one end is fixed and other end is free. 10

- b. A solid shaft rotating at 500 rpm transmits 30 kW. Maximum torque is 20% more than the mean torque. Material of the shaft has the allowable shear stress 65 MPa and modulus of rigidity 81 GPa. Angle at twist in the shaft should not exceed 1° in 1 m length. Determine the diameter of the shaft.

10

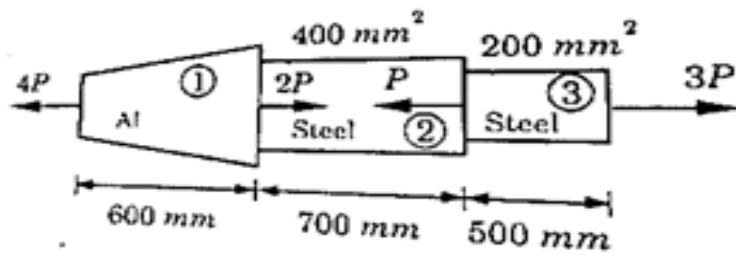


Figure 2(a)

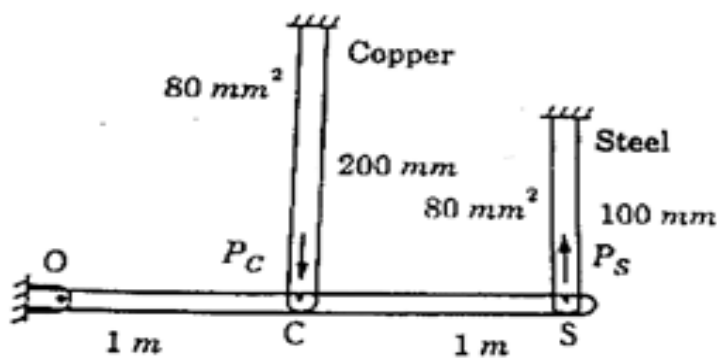


Figure 3(a)

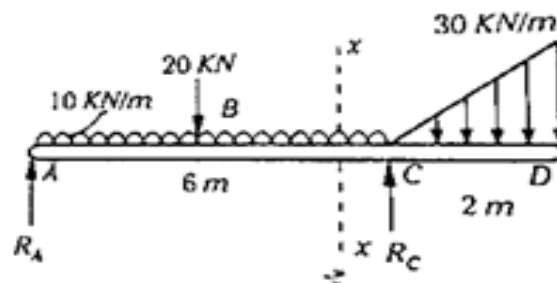


Figure Q(5)

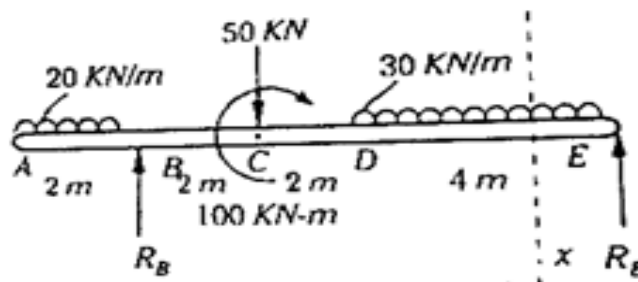


Figure Q(6)
